

Input voltage	Output voltage	Output current	Output power	Efficiency	Size
36-75V DC	12V DC	10 Amps	120 Watts	92%	110*70*23mm



The WGI10-48S12L is an isolated DC-DC converter that uses a synchronous rectification technology, and features high efficiency and power density. It has the dimensions of 110mm x 70mm x 23mm (4.33 in. x 2.76 in. x 0.91 in.) and provides the rated output voltage of 12 V and the maximum output current of 10 A.

#### Features

- Design meeting RoHS / CE
- High efficiency: 92% ( @ 48Vin, 25°C )
- Isolated between input and output
- Internal capacitor: NCC & NICHICON (high reliability)
- 100% full load burn-in test
- Short circuit, Over load, Over temperature, **Reverse** protections
- Waterproof level IP65
- 2 Years warranty

#### Applications

- Industrial
- Alternative Energy
- Golf Cart & Forklift
- Military
- Electromotor
- Telecommunications
- Boat & Yacht
- Medical and so on.

#### Model naming method

**WGI10-48S12L**




<b>Electrical Specifications</b>					
Conditions: TA = 25° C (77° F), Airflow = 1.0 m/s (200 LFM), Vin = 48 V, Vout = 12 V , unless otherwise specified.					
Parameter	Min.	Typ.	Max.	Units	Remarks
<b>Absolute maximum ratings</b>					
Operating ambient temperature	-40	-	+50	° C	
Shell ambient temperature	-40	-	80	° C	
Storage temperature	-55	-	100	° C	
Operating humidity	5	-	95	%	Non-condensing
Atmospheric pressure	62	-	106	Kpa	
Altitude	-	-	4000	m	
Cooling way	-	-	-		Natural cooling
<b>Input characteristics</b>					
Input voltage	36	48	75	V	-
Max. input voltage	-	-	78	V	Continuous
Undervoltage shutdown	30	31.5	36	V	Automatic recovery
Undervoltage recovery	31	34	36	V	Automatic recovery
Max. input current	-	-	5	A	Vin = 36V; Iout = 10A
No load current	-	80	300	mA	Vin = 48V
Positive electrode cable	-	16	-	AWG	recommend
Negative electrode cable	-	16	-	AWG	recommend
Enable PIN cable	-	-	-	AWG	None
Fuse	-	7.5	-	A	
<b>Output characteristics</b>					
Efficiency	-	92	-	%	Vin = 48V; Iout = 10A
Output voltage	11.65	12	12.35	V	Vin = 48V; Iout = 10A
Regulator accuracy	-	±2	-	%	
Voltage regulation	-	±2	-	%	
Load Regulation	-	±2	-	%	
Oversupply protection	13.8	14.3	15	V	Hiccup mode
Output current	0	-	10	A	
Overcurrent protection	10.5	12	14	A	
External capacitance	0	1000	2000	µF	
Output ripple and noise	-	50	200	mVp-p	Vin = 36–75 V; Oscilloscope bandwidth: 20 MHz;
Output voltage rise time	-	8	50	ms	
Boot delay time	-	30	100	ms	
Out voltage overshoot	-	-	5	%	
Over temperature protection	-	-	85	° C	Shell temperature, @ 80° C Restore working
Short circuit protection	-	-	-		Long-term (4 hours) short circuit is not damaged, Hiccup mode
Positive electrode cable	-	16	-	AWG	recommend
Negative electrode cable	-	16	-	AWG	recommend

<b>Safety and EMC features</b>				
Anti-electric Strength	Input to Output	≥1500	V	Leakage current ≤ 3.5mA, 1min, no breakdown, no arcing
	Input to Shell	≥1500	V	
	Output to Shell	≥500	V	
Insulation resistance	Input to Output	≥50	MΩ	Test voltage = 500V
	Input to Shell			
	Output to Shell			
<b>Other characteristics</b>				
Weight	≤250	g		
Package	Color box			
MTBF	≥200,000	H	Vin = 48V; Iout = 10A	
Switching frequency	250±30	KHz		


### Characteristic Curves

Conditions: TA = 25° C (77° F), Vin = 48 V, Vout = 12 V , unless otherwise specified.


**Figure 1, Efficiency**

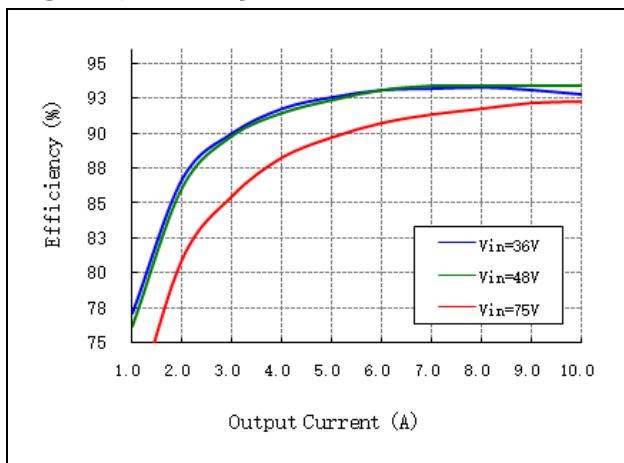

**Figure 2, Power dissipation**

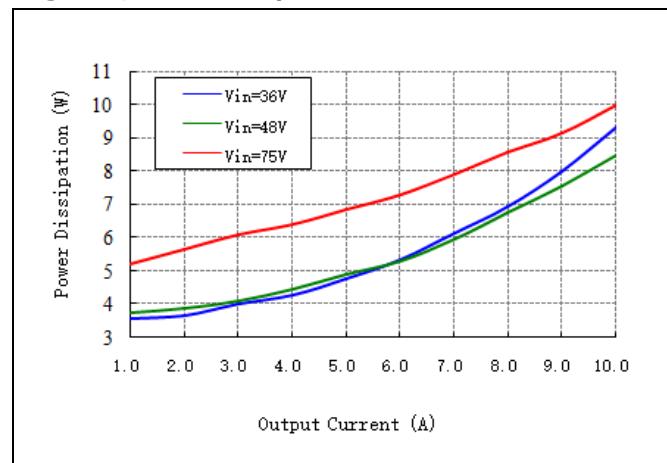


**Figure 3, Input V-I**

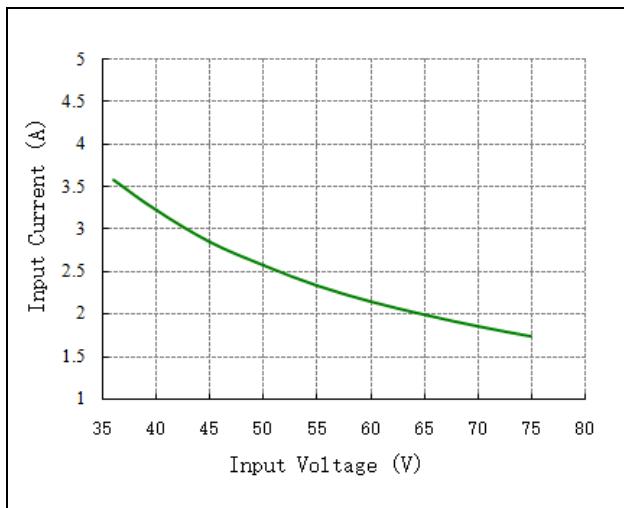


### Typical Waveforms

Conditions: TA = 25° C (77° F), Vin = 48 V, unless otherwise specified.


**Figure 4, 25% - 50% load dynamic**

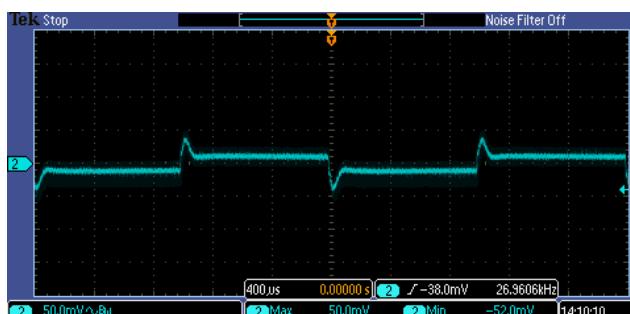


**Figure 5, 50% - 75% load dynamic**

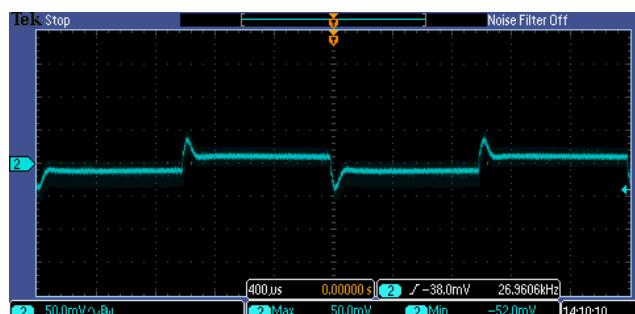

**Figure 6, Output voltage established (Iout = 10A)**

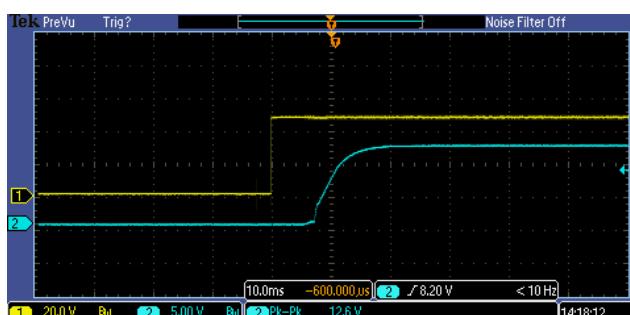

**Figure 7, Output ripple & noise (Iout = 10A)**

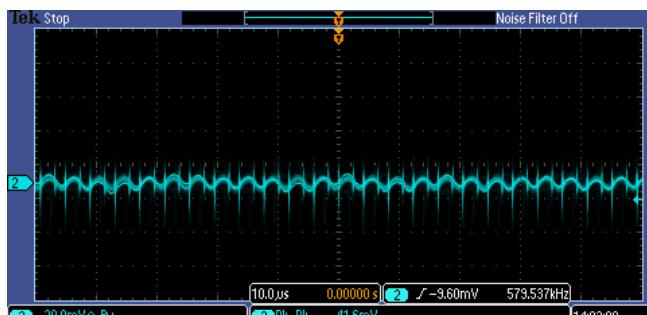


### Feature Description


#### Remote On/Off (CNT) (Optional)

Logic Enable	Low level (0 - 30Vdc)	High level (32 - 75Vdc)	Left open
Positive logic	Off	On	Off


#### Various circuits for driving the CNT




Simple control

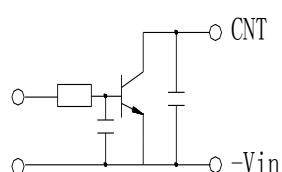

Transistor control



Isolation control

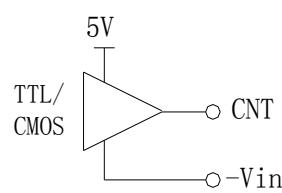

Direct logic drive

#### Input Undervoltage Protection

The converter will shut down after the input voltage drops below the under voltage protection threshold for shutdown. The converter will start to work again after the input voltage reaches the input under voltage protection threshold for startup. For the Hysteresis, see the Protection characteristics.

#### Output Overcurrent Protection

The converter equipped with current limiting circuitry can provide protection from an output overload or short circuit condition. If the output current exceeds the output overcurrent protection set point , the converter enters hiccup mode. When the fault condition is removed, the converter will automatically restart.

**Overtemperature Protection**

A temperature sensor on the converter senses the average temperature of the module. It protects the converter from being damaged at high temperatures. When the temperature exceeds the over temperature protection threshold, the output will shut down. It will allow the converter to turn on again when the temperature of the sensed location falls by the value of Over temperature Protection Hysteresis.

**Reverse Protection**


Reverse voltage protection circuits prevent damage to power supplies and electronic circuits in the event of a reverse voltage applied at the input terminals. The protection ensures that the components are not damaged by accidental swap of the power supply connections.

**Output Overvoltage Protection**

When the voltage directly across the output pins exceeds the output overvoltage protection threshold, the converter will enter hiccup mode. When the fault condition is removed, the converter will automatically restart.

**Thermal Consideration**

Sufficient airflow should be provided to help ensure reliable operating of the WGI10-48S12L. Therefore, thermal components are mounted on the top surface of the WGI10-48S12L to dissipate heat to the surrounding environment by conduction, convection and radiation. Proper airflow can be verified by measuring the temperature at the middle of the base plate.

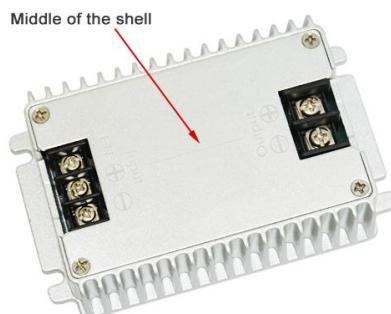

**Dimension**