


| Input voltage | Output voltage | Output current | Output power | Efficiency | Size       |
|---------------|----------------|----------------|--------------|------------|------------|
| 9-40V DC      | 28V DC         | 5 Amps         | 140 Watts    | 97.9%      | 74*74*32mm |

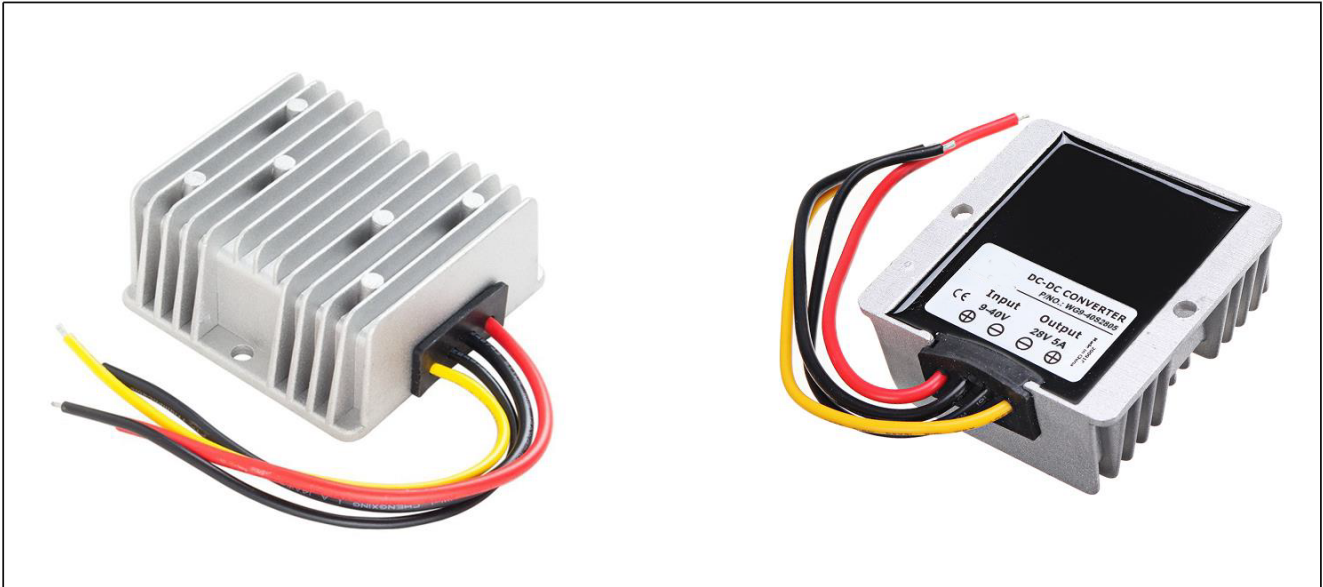

The WG9-40S2805 is a Non-isolated DC-DC converter that uses a synchronous rectification technology, and features high efficiency and power density. It has the dimensions of 74mm x 74mm x 32mm (2.91 in. x 2.91 in. x 1.26 in) and provides the rated output voltage of 28V and the maximum output current of 5A.

### Features

- Design meeting RoHS / CE
- High efficiency: 97.9% (@ 24Vin, 25°C)
- Import capacitors, high reliability
- Input transient absorption protection
- Support -40 °C environment
- 100% full load burn-in test
- Short circuit, Over load, Low voltage protections
- Remote ON/OFF control (optional)
- Waterproof level IP68
- 2 Years warranty

### Applications

- Industrial
- Alternative Energy
- Golf Cart
- Forklift
- Electromotor
- Telecommunications
- Boat & Yacht
- Medical
- LED Marketplaces and so on.

### Model naming method

# WG9-40S2805

**WG** : Model

**9-40** : Input rated voltage

**S** : Single output type

**28** : Output voltage

**05** : Output current

## Electrical Specifications

Conditions: TA = 25 °C (77°F), Airflow = 1 m/s (200LFM), Vin = 24V, Vout = 28V, unless otherwise specified.


| Parameter                       | Min. | Typ.  | Max. | Units | Remarks  |
|---------------------------------|------|-------|------|-------|--|
| <b>Absolute maximum ratings</b> |      |       |      |       |  |
| Operating ambient temperature   | -40  | -     | +55  | °C    |  |
| Shell ambient temperature       | -40  | -     | 80   | °C    |  |
| Storage temperature             | -55  | -     | 100  | °C    |  |
| Operating humidity              | 5    | -     | 95   | %     | Non-condensing   |
| Atmospheric pressure            | 62   | -     | 106  | Kpa   |  |
| Altitude                        | -    | -     | 4000 | m     |  |
| Cooling way                     | -    | -     | -    |       | Natural cooling  |
| <b>Input characteristics</b>    |      |       |      |       |  |
| Input voltage                   | 9    | 12/24 | 40   | V     | -  |
| Max. input voltage              | -    | -     | 44   | V     | Continuous   |
| Undervoltage shutdown           | 7    | 8     | 9    | V     | Automatic recovery   |
| Undervoltage recovery           | 8    | 9     | 10   | V     | Automatic recovery   |
| Max. input current              | -    | -     | 17   | A     | Vin = 9V; Iout = 5A  |
| No load current                 | -    | 67    | 100  | mA    | Vin = 24V  |
| Positive electrode cable        | 14   | -     | -    | AWG   | If the wire length is greater than 50cm, it is recommended to use a thicker wire diameter. |
| Negative electrode cable        | 14   | -     | -    | AWG   |  |
| Enable PIN cable                | 22   | -     | -    | AWG   | If the product has this feature  |
| Fuse                            | -    | 20    | -    | A     | Input positive has built-in fuse   |
| <b>Output characteristics</b>   |      |       |      |       |  |
| Efficiency                      | -    | 97.9  | -    | %     | Vin = 24V; Iout = 5A   |
| Output voltage                  | 27.8 | 28    | 28.3 | V     | Vin = 24V; Iout = 5A   |
| Regulator accuracy              | -    | ±2    | -    | %     |  |
| Voltage regulation              | -    | ±2    | -    | %     |  |
| Load Regulation                 | -    | ±2    | -    | %     |  |
| Overvoltage protection          | -    | -     | -    | V     |  |
| Output current                  | 0    | -     | 5    | A     |  |
| Overcurrent protection          | -    | 7     | 8    | A     | Vin = 24V  |
| External capacitance            | -    | -     | -    | μF    | Don't need   |
| Output ripple and noise         | -    | 56    | 250  | mVp-p | Vin = 9-40V; Iout = 5A,<br>Oscilloscope bandwidth: 20 MHz                                  |
| Output voltage rise time        | -    | 143   | 160  | mS    |  |
| Boot delay time                 | -    | 163   | 200  | mS    |  |
| Out voltage overshoot           | -    | 1     | 2    | %     | Vin = 24V, 50%-75% Load step   |
| Over temperature protection     | -    | -     | 85   | °C    | @ shell temperature  |
| Short circuit protection        | -    | YES   | -    |       | Long-term (4 hours) short circuit is not damaged, Hiccup mode                              |
| Positive electrode cable        | 16   | -     | -    | AWG   | If the wire length is greater than 50cm, it is recommended to use a thicker wire diameter. |
| Negative electrode cable        | 16   | -     | -    | AWG   |  |

| Safety and EMC features |                 |      |     |   |
|-------------------------|-----------------|------|-----|---|
| Anti-electric Strength  | Input to Output | -    | V   | Leakage current ≤ 3.5mA, 1min,<br>no breakdown, no arcing |
|                         | Input to Shell  | ≥500 | V   |   |
|                         | Output to Shell | ≥500 | V   |   |
| Insulation resistance   | Input to Output | ≥10  | MΩ  | Test voltage = 500V                                       |
|                         | Input to Shell  |      |     |   |
|                         | Output to Shell |      |     |   |
| Other characteristics   |                 |      |     |   |
| Weight                  | ≤ 290           |      | g   |   |
| Package                 | White box       |      |     |   |
| MTBF                    | ≥200,000        |      | H   | Vin= 28V; Iout= 5A  |
| Switching frequency     | 130±10          |      | KHz |   |


### Characteristic Curves

Conditions:  $T_A = 25^\circ\text{C}$  ( $77^\circ\text{F}$ ),  $V_{in} = 24\text{V}$ ,  $V_{out} = 28\text{V}$ , unless otherwise specified.


**Figure 1, Efficiency**

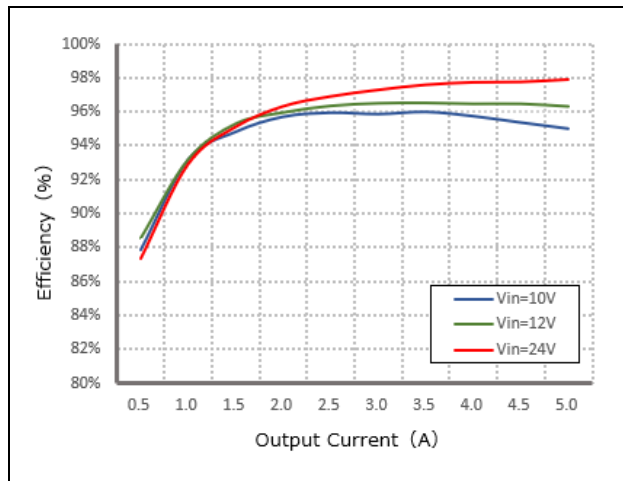

**Figure 2, Power dissipation**

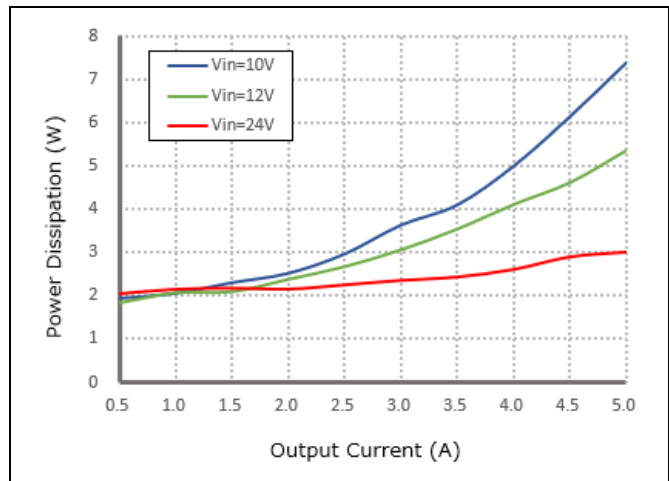


**Figure 3, Input V-I,  $I_{out}=5\text{A}$**

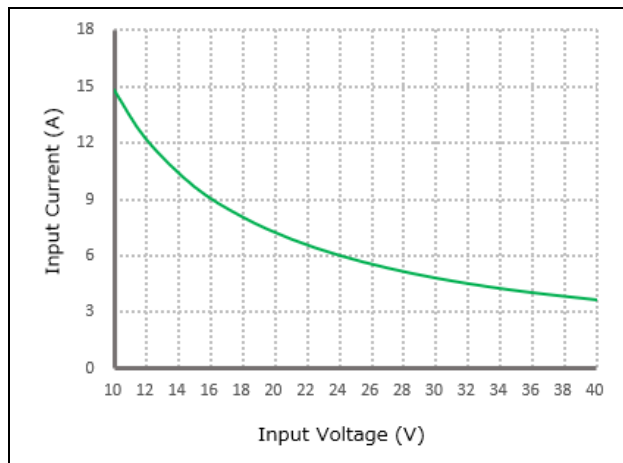


## Typical Waveforms

Conditions:  $T_A = 25^\circ\text{C}$  ( $77^\circ\text{F}$ ),  $V_{in} = 24\text{V}$ , unless otherwise specified.


**Figure 4, 25% - 50% load dynamic**

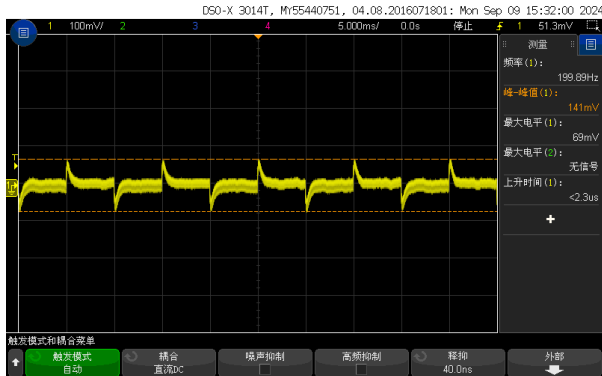


**Figure 5, 50% - 75% load dynamic**

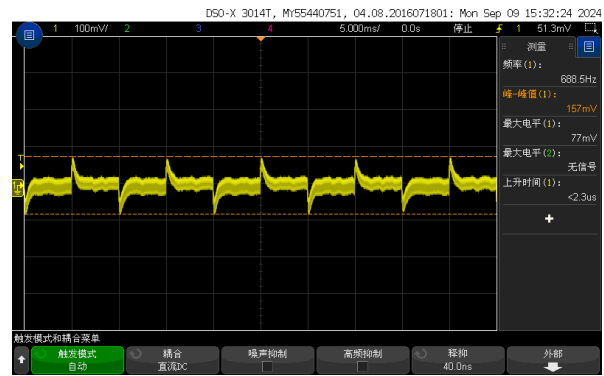

**Figure 6, Output voltage established ( $I_{out} = 5\text{A}$ )**

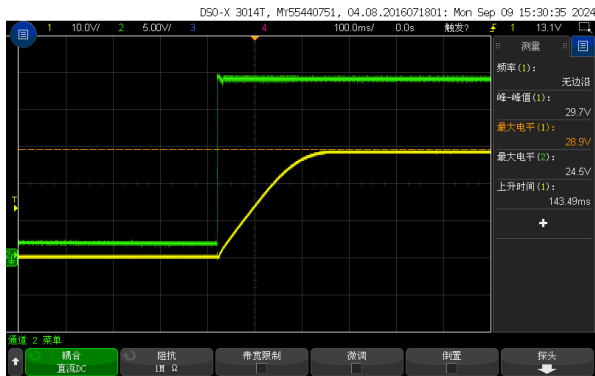

**Figure 7, Output ripple & noise ( $I_{out} = 5\text{A}$ )**

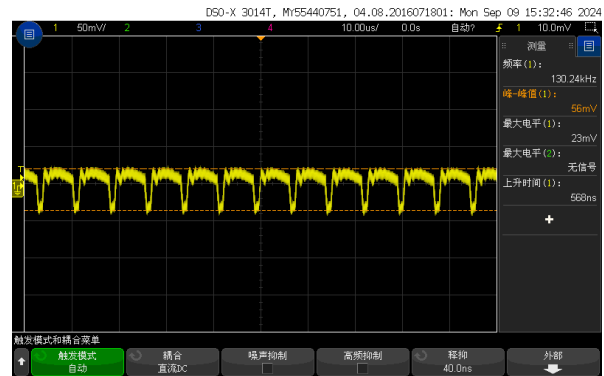


## Feature Description


### Remote On/Off (EN) (Optional)

| Logic Enable   | Low level (0 - 9Vdc) | High level (9-40Vdc) | Left open |
|----------------|----------------------|----------------------|-----------|
| Positive logic | Off                  | On                   | Off       |

### Various circuits for driving the EN

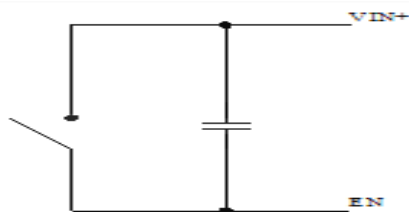

Simple control

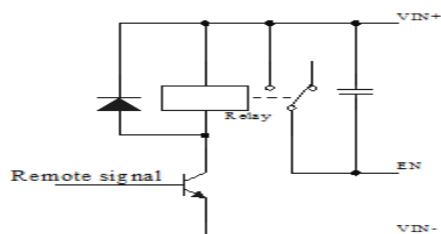

Transistor control

### Input Undervoltage Protection

The converter will shut down after the input voltage drops below the under-voltage protection threshold for shutdown. The converter will start to work again after the input voltage reaches the input under voltage protection threshold for startup. For the Hysteresis, see the Protection characteristics.

### Output Overcurrent Protection

The converter equipped with current limiting circuitry can provide protection from an output overload or short circuit condition. If the output current exceeds the output overcurrent protection set point, the converter enters hiccup mode. When the fault condition is removed, the converter will automatically restart.


### Overtemperature Protection

A temperature sensor on the converter senses the average temperature of the module. It protects the converter from being damaged at high temperatures. When the temperature exceeds the over temperature protection threshold, the output will shut down. It will allow the converter to turn on again when the temperature of the sensed location falls by the value of Over temperature Protection Hysteresis

## Thermal Consideration

Sufficient airflow should be provided to help ensure reliable operating of the WG9-40S2805

Therefore, thermal components are mounted on the top surface of the WG9-40S2805 to dissipate heat to the surrounding environment by conduction, convection, and radiation. Proper airflow can be verified by measuring the temperature at the middle of the base plate.

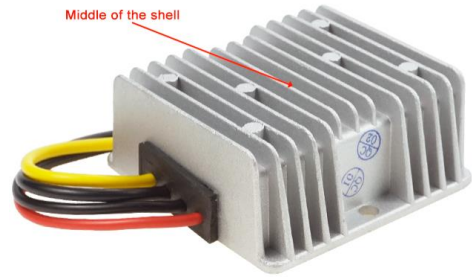

## Dimension

